

Liebert® GXT3, 500VA -3000VA Models Reliable On-Line UPS Protection In A Compact 2U Package



Liebert GXT3 is a true on-line UPS that delivers continuous, high-quality AC power to IT equipment with no break when transferring to battery. It protects equipment from virtually all power disturbances due to blackouts, brownouts, sags, surges or noise interference. UPS is available in rack/tower and mini-tower configurations.

One of the most affordable UPS systems in its class, Liebert GXT3 leads the industry in combining small size, high capacity and high reliability features:

- On-line design means zero transfer time from external to internal power. When utility power fails, your critical load remains supported by a seamless flow of power.
- Liebert GXT3 rated output power factor of 0.9 better matches up with switch-mode power supplies used in today's IT equipment. A higher output power factor allows for a more efficient utilization of the UPS.
- The UPS provides easy serviceability with user replaceable hot-swappable batteries.
- For maximum control, Liebert GXT3 is custom configurable to your needs using a specially designed Windows software package.

Ideally suited for:

- PCs
- Network workstations
- Servers
- Network closets
- Large network peripherals
- VoIP

SBC Data Power

1041 W. 18th Street, Suite B104
Costa Mesa, Ca USA 92627
www.sbcdatapower.com
Phone 949 646 8191
Fax 949 258 5288

Email cthompson@sbcdatapower.com

 **SBC DATA POWER**

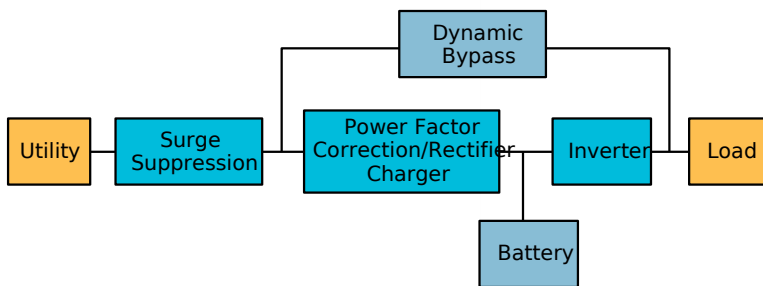

EMERSON
Network Power™

Liebert GXT3 Standard Features

The Proven Reliability Of True On-Line Operation Plus The Features You Need Most

The Liebert GXT3 requires just a slim 2U of rack space. Clients get up to 3kVA of capacity and battery backup in 120V or 230V UPS systems. External battery cabinets add extended run time.

On-Line UPS Protection for Essential and Critical Applications



Liebert GXT3 is a true on-line power source, so whatever the quality of power coming in, the pure sinewave output meets the exacting standards of sensitive equipment.

Liebert GXT3 includes:

- Power factor correction
- Internal batteries
- Frequency conversion
- Internal automatic bypass to utility in case of adverse UPS condition
- Manual bypass capability
- Support for up to four external battery cabinets (rack/tower models)

Liebert GXT3 handles all these potential power problems:

- Power spikes and transients
- EMI/RFI noise
- Voltage sags and brownout conditions
- Harmonics
- Power-factor corrected loads
- Outages
- Frequency variations

Flexibility:

Up To Six Battery-Backed Outlets
A generous quantity of battery-backed outlets allows more equipment to be protected by the UPS.

Rotatable Display Panel
The LED display panel rotates 90° to make the readout of the LED display easy to see in rack or tower position.

Automatic Frequency Sensing
The UPS automatically adjusts to the input frequency, 50Hz or 60Hz.

Mounting Flexibility
Optional telescoping rack rails mount to the sides of the UPS for easy installation into a rack enclosure. A standard tower support base ships with the UPS.



Liebert GXT3 is easily configured for either rack-mount or tower applications. The LED display rotates for easy viewing in either orientation.



Liebert GXT3 contains internal batteries, and is also able to support up to four external battery cabinets – also 2U size.

Higher Availability:

Advance Early Warning of UPS System Status

Audible and visual alarms alert you to an output overload, low battery, battery discharge, or replace battery condition.

4-8 minutes of Battery Backup Time at Full load

Provides time for an orderly shutdown of equipment when utility power fails. Matching external battery cabinets offer additional backup time.

Overload Capability

Designed to handle overload conditions.

Full Sequenced Battery Testing

Provides automatic and manual self-diagnostic battery testing capabilities. This provides a comprehensive analysis of the batteries within the UPS & notify you when the batteries need to be replaced.

User Replaceable Hot Swappable Batteries

Easy to replace batteries increase life and provide prolonged reliability. Batteries are located behind the front bezel of the unit.

Lowest Total Cost Of Ownership:

0.9 Output Power Factor

Liebert GXT3 rated output power factor of 0.9 designed for switch-mode power supplies used in today's IT equipment. A higher power factor is a more efficient utilization of the UPS.

Wide Input Voltage Window

Prolongs battery life for the UPS by using utility power before transferring to battery.

Power-Factor Correction

Prevents noise and distortion from being passed on to your computers and servers..

Internal Automatic and Manual Bypass Capability

Assures continuity of power to loads during system problems or maintenance.

Intelligent Battery Management

Efficient three-stage charging technology and comprehensive protection that extends battery life for greater availability.

Input Circuit Breaker

Increased protection to ease recovery from overloads.

Lightning and Surge Protection

The voltage surge suppression (TVSS) circuitry provided by the UPS provides protection for equipment from incoming spikes, surges, and other power anomalies.

Intelligent Fan Operation

Automatically changes speed depending on requirements to decrease power consumption..

Efficient Operation

≥ 88% AC-AC, minimum.

Warranty Protection

The industry's best warranty – two-year warranty with UPS and replacement in the event operating issues..

Multiple Choices For Communication, Shutdown And Reporting:

SNMP And Web-Based Communication Options

Liebert IntelliSlot® Web Card provides SNMP and web-based management to your Liebert GXT3. Provides SNMP MIB to monitor and control your UPS from your network management station or any PC running Microsoft Internet Explorer.

- Network shutdown
- Sends both SNMP traps and emails for event notification, and automatically emails a daily UPS history
- Auto-senses 10M/100M Ethernet
- Compatible with shutdown software to ensure graceful computer shutdown

The Liebert GXT3 is also fully compatible with:

- Liebert MultiLink™ shutdown software.
- Liebert Nform™ software
- Liebert Multiport
- Liebert IntelliSlot Relay Interface

USB Communications

Windows (98 and later) built-in power management provides monitoring of UPS and manage the automatic shutdown of Computers when a power outage occurs.

Optional Liebert MicroPOD Output Distribution And Maintenance Bypass Module

The Liebert MicroPOD Maintenance Bypass and Output Distribution Unit ensures continuous uptime by allowing equipment to operate on utility power..

Features include:

- 2U height minimizes rack space requirements
- Installs with plug-and-play ease
- Two-year, replacement warranty



Liebert MicroPOD



Liebert GXT3 mini-tower model provides 1000VA capacity in a compact design.

Specifications

Model Number	GXT3-500RT120	GXT3-700RT120	GXT3-1000RT120	GXT3-1000MT120
Model Rating VA/W	500/450	700/630	1000/900	1000/900
Dimensions: in. (mm) DxWxH	19.7x16.9x3.4 (497x430x85)			15.4x6.9x8.9 (390x175x225)
Weight: lbs. (kg)	44 (20)			
Input AC Parameter				
Voltage Range	120VAC nominal; variable based on output load			
Frequency	40Hz~ 70Hz; Auto Sensing			
Input Power Cord	10 ft. attached w/ NEMA 5-15P plug			
Output AC Parameter				
Output Receptacles	5-15R x 6			
Voltage	110/115/120/127VAC (user-configurable); ±3%			
Waveform	Sine wave			
Battery				
Full Load	12 minutes	6 minutes	5 minutes	5 minutes
Half Load	30 minutes	14 minutes	15 minutes	15 minutes
Recharge Time	3 Hours to 90% capacity after full discharge with 100% load till UPS auto-shutdown			
Agency				
Safety	UL 1778, cUL Listed			
RFI/EMI	FCC Part 15, Class A=CISPR22 Class B			
Surge Immunity	IEC 62040-2 2nd Ed			
Transportation	ISTA Procedure 1A			

Model Number	GXT3-1500RT120	GXT3-2000RT120	GXT3-3000RT120	GXT3-3000RT208
Model Rating VA/W	1500/1350	2000/1800	3000/2700	3000/2700
Dimensions: in. (mm) DxWxH	19.7x16.9x3.4 (497x430x85)		23.7x16.9x3.4 (602x430x85)	
Weight: lbs. (kg)	48.5 (22)	52.9 (24)	61.7 (28)	61.7 (28)
Input AC Parameter				
Voltage Range	120VAC nominal; variable based on output load			208VAC nominal; variable based on output load
Frequency	40Hz~ 70Hz; Auto Sensing			
Input Power Cord	10 ft. attached w/ NEMA 5-15P plug	10 ft. attached w/ NEMA 5-20P plug	10 ft. attached w/ NEMA L5-30P plug	10 ft. attached w/ NEMA L6-20P plug
Output AC Parameter				
Output Receptacles	5-15R x 6	5-20R x 6	L5-30Rx1+5-20Rx6	L6-20Rx1+L6-15Rx2
Voltage	110/115/120/127VAC (user-configurable); ±3%			208/220/230/240 VAC (user-configurable); ±3%
Waveform	Sine wave			
Battery				
Full Load	5 minutes	4 minutes	4 minutes	4 minutes
Half Load	16 minutes	11 minutes	14 minutes	14 minutes
Recharge Time	3 Hours to 90% capacity after full discharge with 100% load till UPS auto-shutdown			
Agency				
Safety	UL 1778, cUL Listed			
RFI/EMI	FCC Part 15, Class A=CISPR22 Class B			
Surge Immunity	IEC 62040-2 2nd Ed			
Transportation	ISTA Procedure 1A			

Liebert Corporation

1050 Dearborn Drive
P.O. Box 29186
Columbus, Ohio 43229
800 877 9222 Phone (U.S. &
Canada Only)
614 888 0246 Phone (Outside U.S.)
614 841 6022 FAX

Via Leonardo Da Vinci 8
Zona Industriale Tognana
35028 Piove Di Sacco (PD)
Italy
39 049 9719 111 Phone
39 049 5841 257 FAX

Emerson Network Power Asia Pacific
29/F, The Orient Square Building
F. Ortigas Jr. Road, Ortigas Center
Pasig City 1605
Philippines
+63 2 687 6615
+63 2 730 9572 FAX

liebert.com

24 x 7 Tech Support

800 222 5877 Phone
614 841 6755 (outside U.S.)

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2009 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice.

All names referred to are trademarks or registered trademarks of their respective owners.

® Liebert is a registered trademark of the Liebert Corporation.

SL-23182 (R09/09) Printed in USA

Emerson Network Power.
The global leader in enabling
Business-Critical Continuity

- **AC Power**
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets

SBC Data Power

1041 W. 18th Street, Suite B104
Costa Mesa, Ca USA 92627
www.sbcdatapower.com
Phone 949 646 8191
Fax 949 258 5288

Email cthompson@sbcdatapower.com